

FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1000HIDU1	Electronic	Soft Start	1	MH/CDM/HPS Double Ended/HQI Lamp

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
90~265V	1000W	1100W	12.35A~4.23A	5.0KVRMS	0.99	60Hz	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	Crest Factor	THD	NO PCB'S	
-40 F/-40°C	P	1 Outdoor	1.00	<1.6	<10%		


PHYSICAL CHARACTERISTICS

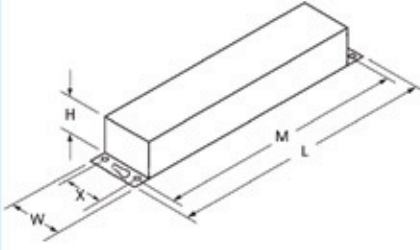	CASE DIMENSIONS					
	UNITS	M	X	L	W	H
	INCHES	18.15	2.68	18.90	4.72	3.15
	TOL(+/-)	0.05	0.05	0.05	0.05	0.05
CONNECTOR WIRETRIP						
UNITS	L	N	GROUND	BLACK	WHITE	
INCHES	PLUG	PLUG	PLUG	20	20	
TOL(+/-)	/			+3 / 8, -0	+3 / 8, -0	


PRODUCT PHOTO



ELECTRICAL DIAGRAM

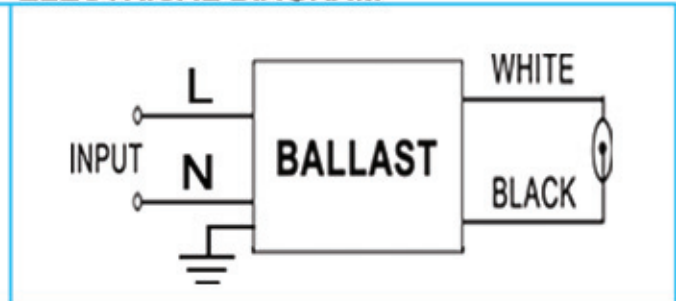

PRODUCT LABEL

BallastWise™ DEXIN Lighting 1-866-4339468	MODEL NO. DXE1000HIDU1 Range: 90V~265V, 50Hz/60Hz Power Factor: ≥ 0.99 Line Current THD: < 10%	1000W HPS & MH Ambient temperature: -40°F~140°F  LISTED E178684 61FK
--	--	--