

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION


CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE254HO51	Electronic	Instant Start	2	F54T5HO,F58T8 PL55W PL50W

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	54W, 58W,55W,50W	115W	Max 1.01A	<30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/18°C			1	0.870	600VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

CASE DIMENSIONS					
UNITS	M	L	W	H	
INCHES	8.40	8.50	1.73	1.00	
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1x16	1x16	1x36	2x24	
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	

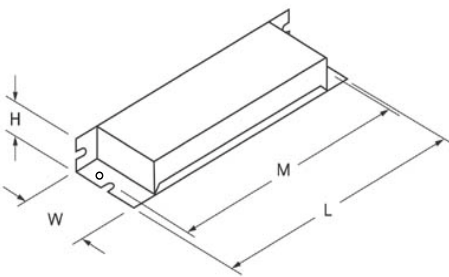

PRODUCT PHOTO

PRODUCT LABEL

<p>BallastWise[™] ELECTRONIC BALLAST</p> <p>Cat. No.:DXE4H8(DXE254HO51) Instant Start Type 1 Outdoor Class P Sound Rating A O.C.V.:600VRMS Start Temp.:0°F~120°F No PCB's Lamp Type:2*F54T5HO, 2*F58T8, 2*PL55W,2*PL50W</p>	<p>Input: 120V 60Hz Max. Line Current:1.01A Power Factor:0.95</p>	<p>DuroPower 1-866-433-9468</p> <p>UL US LISTED E178684 61FK</p>	<p>DATE:</p>
---	--	--	--------------