

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE113MPL	Electronic	Rapid Start	1	PL13w, PL9w, PL7w, PL5w

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	13w	13w	0.23A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	7.077	<110%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	3.16	3.36	1.85	1.00
	TOL(+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1×8	1×8	2×12	2×12	
TOL(+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
56				0.3 lbs	18.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.2×12.2×5.3					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

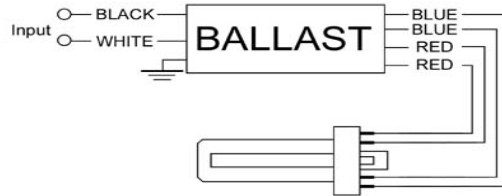

### PRODUCT LABEL

<b>Ballast Wise<sup>TM</sup></b> <b>ELECTRONIC BALLAST</b> <b>MODEL NO.: DXE113MPL</b> Ground Ballast & Mount Within 3/4" of ground Metal Reflector. <b>WARNING: Insulate unused lead(s)</b> for 1000 V. Install per National and Local Electrical Codes.		
Input: 120V/60Hz Max current: 0.23A Power Factor: 0.60 Start Temp: 0°F-120°F No PCB'S PL Lamp: 1×13W, 1×9W, 1×7W, 1×5W		Type I Outdoor Instant Start Sound Rating: A O.C.V.: 400VRMS Class: P
		LISTED E178684 61FK <b>DEXIN DE LIGHTING</b> 1-866-4DEXIN8

