

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE296HO121	Electronic	Instant Start	2	F96T12HO,F84T12HO, F72T12HO,F64T12HO, F60T12HO,F48T12HO


ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF		
120V	60Hz	110W(95W),100W, 85W,80W,75W, 63W	229W	2.01A	30%	0.95	SOUND RATED A	
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/-18°C			1.0	0.437	600VRMS	25kHz		

PHYSICAL CHARACTERISTICS


	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	18.74	19.24	1.72	1.00
	TOL(+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1x44	1x44	1x68	2x44	
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	

PRODUCT PHOTO



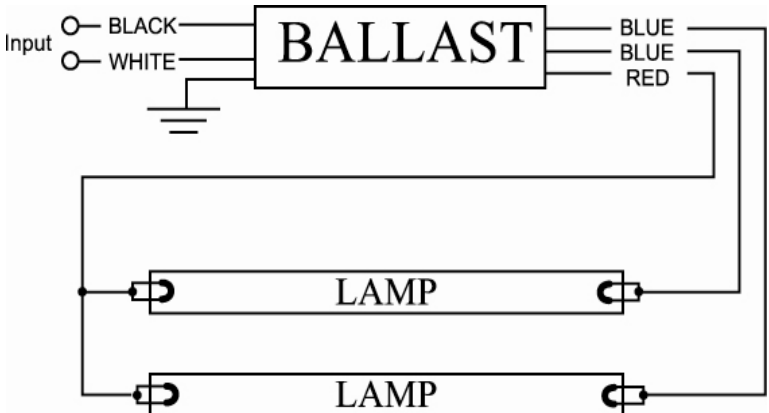

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat.No.: DXE296HO121 Type 1 Outdoor Instant Start Start Temp.: 0°F-120°F Linear Lamp: 1 or 2*F96T12HO/110W, 1 or 2*F96T12HO/95W 1 or 2*F84T12HO/100W, 1 or 2*F72T12HO/85W 1 or 2*F64T12HO/80W 2*F60T12HO/75W 2*F48T12HO/63W</p> <p>Sound Rating A O.C.V.:600VRMS Class P No PCB's</p>	<p>Input: 120V 60Hz Max. Line Current: 2.01A Power Factor: 0.95</p>	<p>DuroPower</p> <p>1-866-433-9468</p> <p>UL US LISTED E178684 61FK</p>	<p>WARNING</p> <p>Risk of Electric shock</p> <ul style="list-style-type: none"> • Turn power off before servicing • Properly ground ballast and fixing 	 <p>DATE:</p>
--	--	---	---	--