

# BallastWise®



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE114M5	Electronic	Rapid Start	1	F14T5, F13T5, F8T5

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	14w, 13w, 8w	Max 14w	Max 0.20A	400VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	6.57	<110%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	5.30	5.50	1.00	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	2×16	2×16	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
64				0.35 lbs	22.58 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.8×12.8×5.9					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

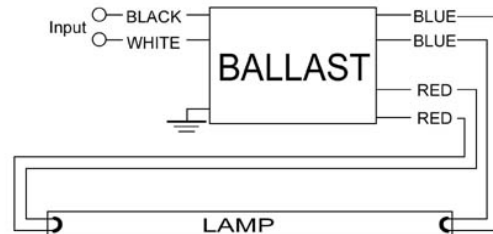

### PRODUCT LABEL

<p><b>Ballast Wise™</b> ELECTRONIC BALLAST</p> <p>Cat No: DXE114M5    Type 1 Outdoor Input: 120V/60Hz    Rapid Start Line Current: 0.20A    Sound Rating: A Power Factor: 0.60    O.C.V.: 400VRMS Start Temp: 0°F-20°F    Class: P Linear Lamp: 1" F14T5, 1" F13T5, 1" F8T5</p>	<p>UL LISTED E178884 DEXIN LIGHTING 1-888-4DEXINS</p> <p>Ground Ballast &amp; Mount within 3/4" of ground Metal Reflector. <b>WARNING: Insulate unused lead(s) for 1000V.</b> Install per National and Local Electrical Codes.</p>	<p>Input BLACK WHITE</p> <p>BALLAST</p> <p>BLUE BLUE RED RED</p> <p>LAMP</p> <p>DATE:</p>
---	--	---

