

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE213MPL(DXE126MPL)	Electronic	Instant Start	1	PL26w

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	26w	26w	0.36A	750VRMS	0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	1.0	3.846	<110%		

PHYSICAL CHARACTERISTICS

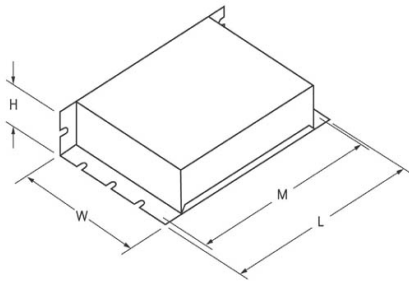

CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	3.16	3.36	1.85	1.00
TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	1×12	1×12
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
56				0.3 lbs	18.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.2×12.2×5.3					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

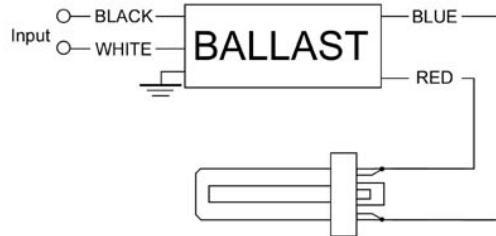

PRODUCT LABEL

<p>Ballast WiseTM ELECTRONIC BALLAST MODEL NO.:DXE213MPL(DXE126MPL) Ground Ballast & Mount Within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>			
<p>DATE:</p>		<p>LISTED E178684 61FK</p>	
<p>Input: 120V/60Hz Max. current: 0.36A Power Factor: 0.60 Start Temp: 0°F-120°F No PCB'S PL Lamp: 1×26W</p>	<p>Type I Outdoor Instant Start Sound Rating: A O.C.V.: 750 VRMS Class: P</p>	<p>DEXIN DE LIGHTING 1-866-4DEXIN8</p>	

