

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8	Electronic	Instant Start	4	F32T8, F25T8, F17T8 F25T12, F34T12, F40T12 F30T8, F18T8, F15T8


ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	32W, 25W, 17W 25W, 34W, 40W 30W, 18W, 15W	111W	Max. 1.12A	<30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
-20°F/-28.8°C			0.92	0.829	600VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

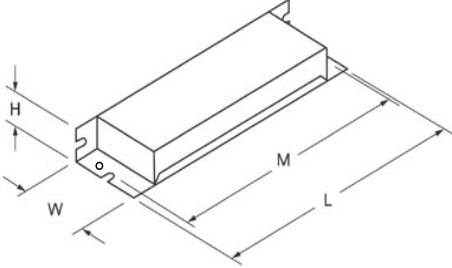

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.40	8.50	1.73	1.00
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	YELLOW	
INCHES	1x16	1x16	4x24	1x36	
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	

PRODUCT PHOTO



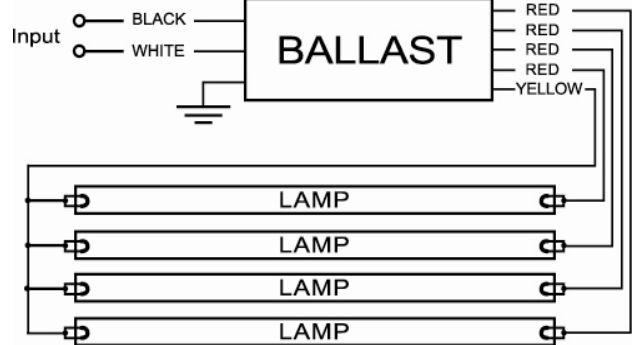

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat.No.: DXE4H8 Instant Start Type 1 Outdoor Class P Sound Rating A O.C.V.: 600VRMS Start Temp.: -20°F ~ 120°F No PCB's Lamp Type: 4*F32T8, 4*F25T8, 4*F17T8 4*F25T12, 4*F34T12, 4*F40T12 4*F30T8, 4*F18T8, 4*F15T8</p>	<p>Input: 120V 60Hz Max. Line Current: 1.12A Power Factor: 0.95</p>	<p>DuroPower 1-866-433-9468</p> <p>LISTED E178684 61FK</p> 	<p>Tc: 75°C max.</p>  <p>DATE:</p>
--	---	--	---