

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE896HO121	Electronic	Instant Start	8	F96T12HO, F84T12HO, F72T12HO, F64T12HO, F60T12HO, F48T12HO


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	110W(95W), 100W, 85W, 80W, 75W, 63W	916W	8.04A	30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/-18°C			1.0	0.109	600VRMS	25kHz		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	18.74	19.24	3.50	2.75
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	CONNECTOR	CONNECTOR	4x68	8x44	
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	

PRODUCT PHOTO

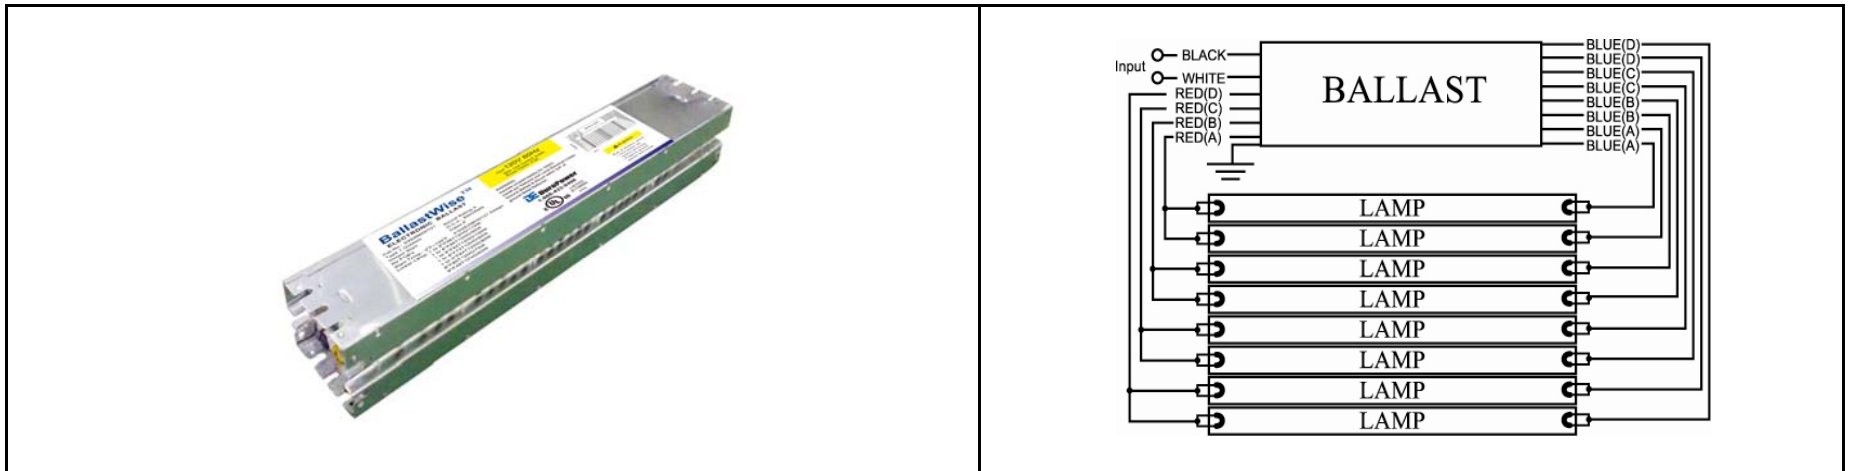

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat.No.: DXE896HO121 Type 1 Outdoor Instant Start No PCB's Start Temp.: 0°F-120°F</p> <p>Sound Rating A O.C.V.: 600VRMS Class P 4*DXE296HO121 Design</p> <p>Linear Lamp: 1 to 8*F96T12HO/110W 1 to 8*F96T12HO/95W 1 to 8*F84T12HO/100W 1 to 8*F72T12HO/85W 1 to 8*F64T12HO/80W 8*F60T12HO/75W 8*F48T12HO/63W</p>	<p>Input: 120V 60Hz Max. Line Current: 8.04A Power Factor: 0.95</p> <p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p> <p>DuroPower 1-866-433-9468</p> <p>LISTED E178684 61FK</p>	<p>DATE:</p> <p>WARNING</p> <p>Risk of Electric shock • Turn power off before servicing • Properly ground ballast and fixing</p>
---	---	---