

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION


CATALOG	TYPE	NUMBER OF LAMPS	LAMP TYPE
DXE150HID1	Electronic	1	MH Lamp 150W

ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE	LAMP WATTS		INPUT WATTS	INPUT CURRENT	PF	FREQUENCY	SOUND RATED
120V	150W		160W	1.48A	>0.90	60Hz	A
START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)		
0°F ~ 120°F	P	1 Outdoor	1.00	0.625	<25%	NO PCB'S	

PHYSICAL CHARACTERISTICS


CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	5.94"	6.14"	4.06"	1.73"
TOL(+/-)	0.39	0.39	0.39	0.39
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	RED
INCHES	14.17"	14.17"	14.17"	14.17"
TOL(+/-)	0.39	0.39	0.39	0.39

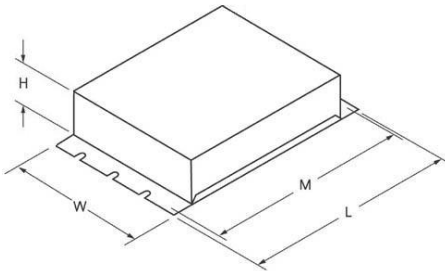

PRODUCT PHOTO

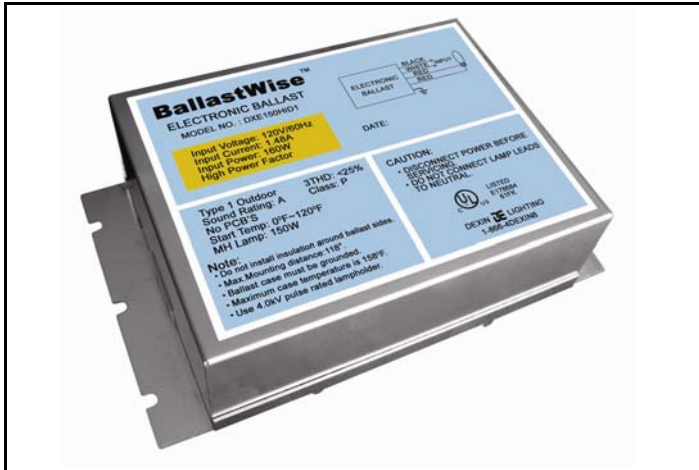

ELECTRICAL DIAGRAM

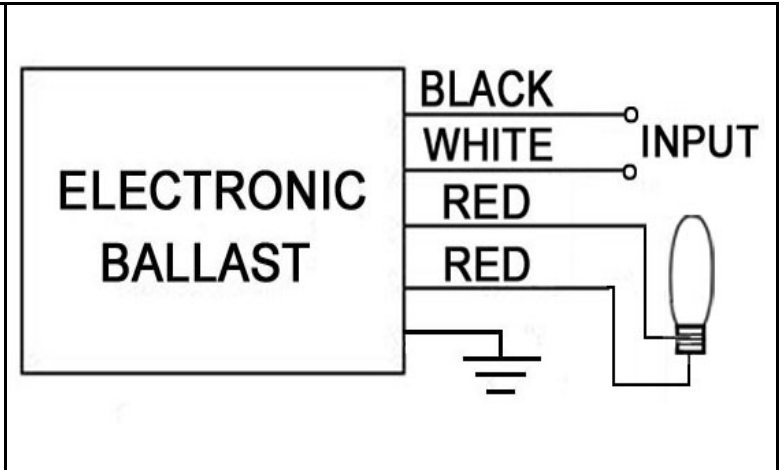

PRODUCT LABEL

BallastWise™
ELECTRONIC BALLAST
MODEL NO. : DXE150HID1

Input Voltage: 120V/60Hz
Input Current: 1.48A
Input Power: 160W
High Power Factor

DATE: _____

UL US LISTED E178684 61FK

DEXIN LIGHTING
1-866-4DEXIN8

Type 1 Outdoor 3THD: <25%
Sound Rating: A Class: P
No PCB'S
Start Temp: 0°F~120°F
MH Lamp: 150W

Note:

- Do not install insulation around ballast sides.
- Max.Mounting distance:118".
- Ballast case must be grounded.
- Maximum case temperature is 158°F.
- Use 4.0kV pulse rated lampholder.

CAUTION:

- DISCONNECT POWER BEFORE SERVICING.
- DO NOT CONNECT LAMP LEADS TO NEUTRAL.