

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE140M12(DXE154HO5)	Electronic	Instant Start	1	F54T5HO, F40T12

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	54W, 40W	54W	Max0.79A	600V	>0.60	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	10outdoor	0.92	1.704	<30%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.00	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
UNITS	BLACK	WHITE	GREEN	RED	BLUE
INCHES	1×16	1×16	1×8	1×36	1×24
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
35				0.8 lbs	30.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

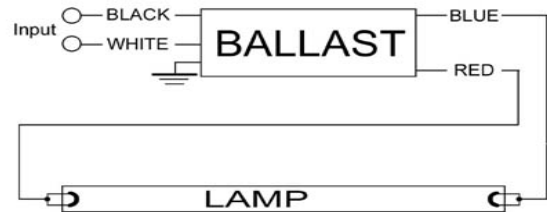

PRODUCT LABEL

Ballast WiseTM ELECTRONIC BALLAST MODEL NO:DXE140M12(DXE154HO5)	Input:120V/60Hz Max Current:0.79 A Power Factor:>0.60 Start Temp:0F-120°F No PCB's Linear Lamp:1*F40T12,1*F54T5HO	Type 1 Outdoor Instant Start Sound Rating: A O.C.V.: 600VRMS Class:P	LISTED E178684 1-888-4DEXIN8 WEST COVINA, CA 91791		Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. DATE:
	DATE:				

