

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H8(DXE155HPL)	Electronic	Instant Start	1	PL-L55W

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	55W	58	0.51A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	10Outdoor	1	1.724	<35%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	7.25	7.50	1.63	0.95
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×24	1×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.7 lbs	21.2 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

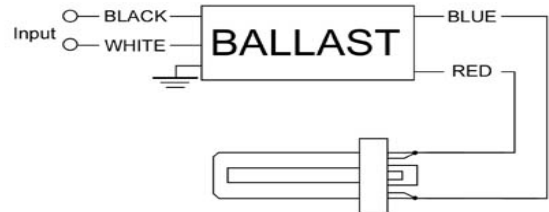

PRODUCT LABEL

<p>Ballast WiseTM ELECTRONIC BALLAST Cat. No.: DXE2H8(DXE155HPL) Type I Outdoor Input: 120V/60Hz Instant Start Max. current: 0.35 A Power Factor: 0.95 Sound Rating: A O.C.V.: 600VRMS Start Temp: 0°F-120°F Class: P PL Lamp: 1×55W</p>	<p>UL LISTED E178684 61FK DEXIN DE LIGHTING 1-866-4DEXIN8 WEST COVINA CA91791</p>	<p>DATE: Ground Ballast & Mount Within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>
--	--	---

