

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H8(DXE165HPL)	Electronic	Instant Start	1	PL65W/55W

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	65W/55W	58W	0.51A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F~120°F	P	10outdoor	0.92	1.586	<35%		

0.92

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.00	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1×16	1×16	1×24	1×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
35				0.8 lbs	30.6 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

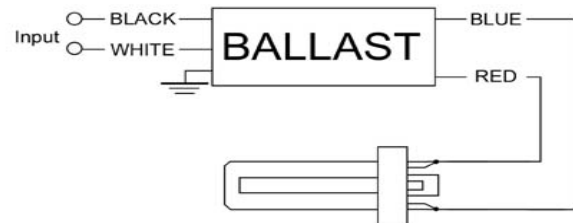

PRODUCT LABEL

BallastWise™ ELECTRONIC BALLAST MODEL NO: DXE2H8(DXE165HPL)	Input:120V/60Hz Max Current:0.51A Power Factor:0.95 Start Temp.:0°F-120°F No PCB'S PL Lamp:1*65W, 1*55W	Type 1 Outdoor Instant Start Sound Rating A O.C.V.:600VRMS Class P	 DEXIN LIGHTING 1-866-433-9468		Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. DATE:
	To: 90°C max.				