

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H12(DXE196H12 1)	Electronic	Instant Start	1	F96T12/75W, F96T12/60W, F84T12, F72T12, F64T12, F60T12

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120v	75W/60W/70W 56W/51W/50W	68.4W	Max. 0.60A	600VRMS	>0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F-18°C	P	1 Outdoor	0.92	1.345	<35%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×44	1×44	1×68	1×44	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			

PRODUCT PHOTO



ELECTRICAL DIAGRAM

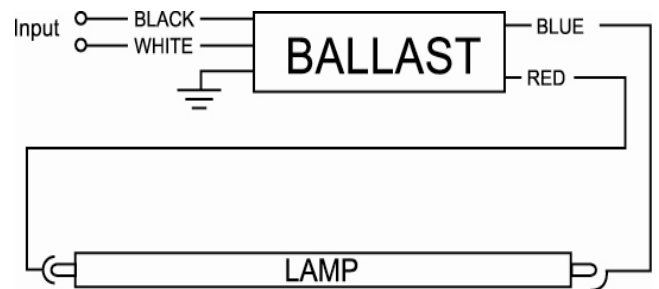

PRODUCT LABEL

Ballast Wise[™] ELECTRONIC BALLAST Cat No.: DXE2H12(DXE196H121) Instant Start Type 1 Outdoor Class P Sound Rating A O.C.V.: 600VRMS Start Temp.: 0°F-120°F No PCB's Lamp Type: 1*F96T12/75W, 1*F96T12/60W 1*F84T12/70W, 1*F72T12/56W 1*F64T12/51W, 1*F60T12/50W	Input: 120V 60Hz Max. Line Current: 0.60A Power Factor: 0.95	LISTED E178684 C [®] US 61FK DEXIN DE LIGHTING 1-866-4DEXIN8	 DATE:
WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.			