

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8(DXE196HPL)	Electronic	Instant Start	1	PL-L96W

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	96W	96	Max 0.89A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	10outdoor	0.92	0.958	<35%		

PHYSICAL CHARACTERISTICS

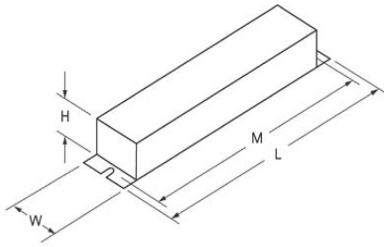


CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	8.90	9.50	1.70	1.20
TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×24	1×24
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO

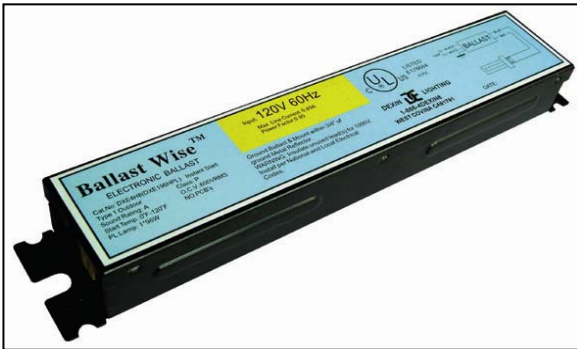

ELECTRICAL DIAGRAM

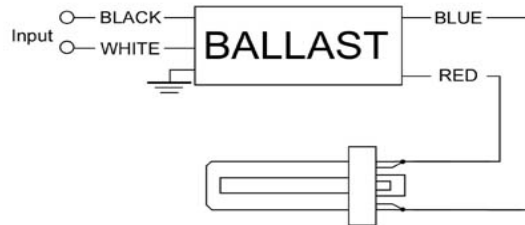

PRODUCT LABEL

Ballast WiseTM ELECTRONIC BALLAST Cat. No: DEX4H8(DXE196HPL) Instant Start Type I Outdoor Class: P Sound Rating: A O.C.V.: 600VRMS Start Temp: 0°F-120°F NO PCB'S PL Lamp: 1×96W	Input: 120V 60Hz Max. Line Current: 0.89A Power Factor: 0.95	LISTED E178684 61FK DEXIN DE LIGHTING 1-866-4DEXIN8 WEST COVINA CA91791	DATE:
---	--	---	-------