

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1H12	Electronic	Instant Start	1	F40T12,F34T12, F30T12,F25T12

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	40W,34W,30W,25W	38W	Max0.33	600V	0.95	60Hz	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
-20°F/-28.8°C	P	1 Outdoor	0.92	2.42	<30%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.50	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1 × 16	1 × 16	1 × 36	1 × 24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.52 lbs	16.2lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	12.7*10.0*6.1					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

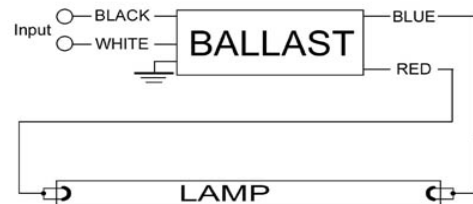

### PRODUCT LABEL

<p><b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST</p> <p>Cat.No DXE1H12      Instant Start Type 1 Outdoor      Class P Sound Rating A      O.C.V. 600VRMS Start Temp: -20F-120F      No PCB's Linear Lamp: 1*F40T12, 1*F34T12, 1*F30T12, 1*F25T12</p>	<p>Input: <b>120V 60Hz</b> Max. Line Current: 0.35A Power Factor: 0.95</p>	<p><b>UL</b> LISTED E178684 61FK</p> <p><b>DEXIN DE LIGHTING</b> 1-866-4DEXIN8</p>	<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast &amp; Mount within 3/4" of ground Metal Reflector.</p> <p>Date: _____</p>
---	--	--	--

