

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1HPL	Electronic	Instant Start	1	PL26w, PL18w

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
277V	26w, 18w	26w	0.10A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	3.538	<35%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	3.60	3.36	2.37	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	1×12	1×12	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.7 lbs	21.2 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

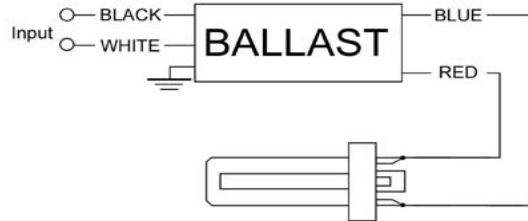

### PRODUCT LABEL

<p><b>Ballast Wise<sup>TM</sup></b>  <b>ELECTRONIC BALLAST</b>  <b>MODEL NO.:DXE1HPL</b>          Ground Ballast &amp; Mount Within          3/4" of ground Metal Reflector.  <b>WARNING: Insulate unused lead(s)</b>  <b>for 1000V. Install per National and</b>  <b>Local Electrical Codes.</b></p>	 DATE:
<p style="background-color: red; color: white; text-align: center; padding: 5px;"><b>Input: 277V 60Hz</b>  <b>Max. Line Current: 0.10A</b>  <b>High Power Factor</b></p> <p>Type I Outdoor      Instant Start          Sound Rating: A      O.C.V.: 600VRMS          Start Temp: 0°F-120°F      Class: P          No PCB'S          PL Lamp: 1* 18W, 1* 26W</p>	<p style="text-align: center;">   <b>LISTED</b>  <b>E178684</b>  <b>61FK</b>  <b>DEXIN DE LIGHTING</b>  <b>1-866-4DEXIN8</b> </p>

