

FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE1HPLU	Electronic	Instant Start	1	PL:42W,32W,26W,18W

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS		INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V/277V	42W,32W,26W,18W		45W	Max0.38/0.16	600v	0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR		BEF	THD(1)	NO PCB'S	
0°F/-18°C	P	1 Outdoor	1		2.222	<10%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	4.56	4.95	2.37	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1×8	1×8	1×16	1×12	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
CARTONS/PALLET	CARTON DIMENSIONS		PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET		

PRODUCT PHOTO



ELECTRICAL DIAGRAM

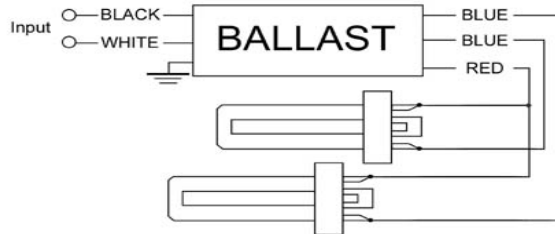

PRODUCT LABEL

DEXIN LIGHTING

1-866-4DEXIN8

Ballast Wise™

DXE2H8U

ELECTRONIC BALLAST

Power Factor >99%
THD <10% Instant Start
Class P, Sound Rated A
No PCB'S Type 1 Outdoor
Inherent Thermal Protection
Protection Thermiques Integree

Input: 120V to 277V 50/60Hz

UL US LISTED 61 FK

Max Current 0.47A@120V or 0.19A@277V

(1) or (2) 26w 4-Pin Quad & Triple Lamps
Min. Starting temp. 0°F/-18°C

ALSO Compatible with
(1) 32w or (1) 42w Triple or (1) 42w Quad Biax

(1) or (2) 18w 4-Pin Quad & Triple PL

(1) or (2) F32T8, F25T8, F17T8

WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.

Input WIRING: 2-LAMP

1-LAMP

