

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2H8U	Electronic	Instant Start	2or1	PL-T PL-Q Linear Lamp

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	42W,32W,26W, 18W,25W,17W	55	120V 0.47A 277V 0.19A	600v	>99%	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F/-18°C	P	10outdoor	1	1.818	<10%		

PHYSICAL CHARACTERISTICS

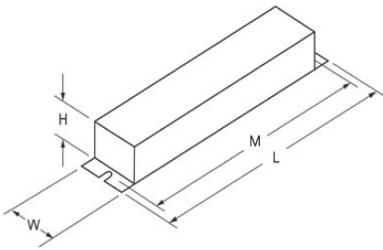

CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	4.56	4.95	2.37	1.00
TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1x8	1x8	1x16	2x12
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2x10.6x6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

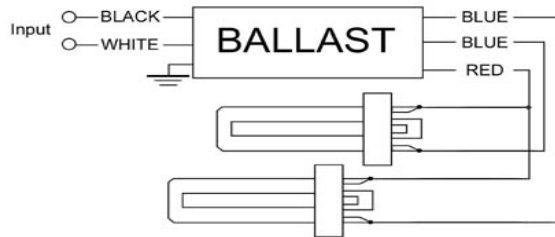

PRODUCT LABEL

DEXIN LIGHTING

1-866-4DEXIN8

Ballast Wise™

DXE2H8U

ELECTRONIC BALLAST

Power Factor >99%
THD <10% Instant Start
Class P Sound Rated A
No PCB'S Type 1 Outdoor
Inherent Thermal Protection
Protection Thermiques Integree

Input: BLACK BLUE
WHITE RED
GND GND

WIRING: 2-LAMP

Input: 120V to 277V 50-60Hz

(c) Max Current 0.47A@120V or 0.19A@277V

(1) or (2) 26w 4-Pin Quad & Triple Lamps
Min. Starting temp. 0°F/-18°C

ALSO Compatible with
(1) 32w or (1) 42w Triple or (1) 42w Quad Biax

(1) or (2) 18w 4-Pin Quad & Triple PL

(1) or (2) F32T8, F25T8, F17T8

WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.