

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE248HO121	Electronic	Instant Start	2	F48T12HO,F42T12HO F36T12HO,F30T12HO F24T12HO,F18T12HO


ELECTRICAL CHARACTERISTICS


INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A
120V	60Hz	60W,55W,50/45W, 50/42W,32W,25W	108W	0.95A	<30%	0.95	
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR	BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
-20°F/-28.8°C			0.92	0.851	600VRMS	>40kHz	

PHYSICAL CHARACTERISTICS

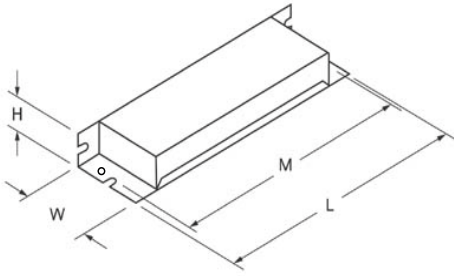	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.40	8.50	1.73	1.00
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1x16	1x16	1x36	2x24	
TOL(+/-)	+3/8,-0	+3/8,-0	+3/8,-0	+3/8,-0	

PRODUCT PHOTO



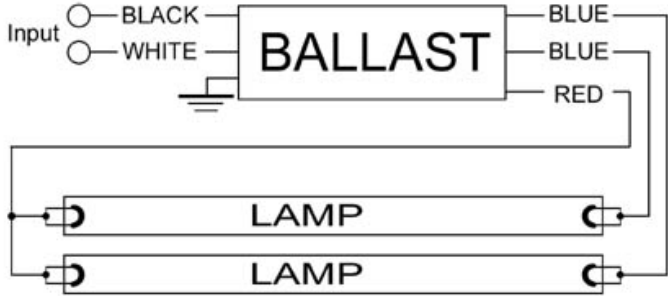

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST</p> <p>Cat. No.:DXE4H12(DXE248HO121) Instant Start Type 1 Outdoor Class P Sound Rating A O.C.V.:600VRMS Start Temp.: -20°F~-120°F No PCB's Lamp Type:2*F48T12HO(60W), 2*F42T12HO(55W) 2*F36T12HO(50W/45W), 2*F30T12HO(50W/42W) 2*F24T12HO(32W), 2*F18T12HO(25W)</p>	<p>Input: 120V 60Hz Max. Line Current:0.95A Power Factor:0.95</p>	<p>DuroPower 1-866-433-9468</p> <p>UL US LISTED E178684 61FK</p>	<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p> <p>DATE:</p>
---	--	--	--