

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H8(DXE255HPL1)	Electronic	Instant Start	2	PL-L55W

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	55W	105W	Max 0.82A	580VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F / - 18°C	P	1 Outdoor	0.92	0.876	<35%		

### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	W	L	H
	INCHES	8.90	1.70	9.50	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	16×1	16×1	36×1	24×2	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30	6	5		1.2 lbs	36.7 lbs	
CARTONS MODEL	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
P3	14.5×10×6.8					

### PRODUCT PHOTO



### ELECTRICAL DIAGRAM

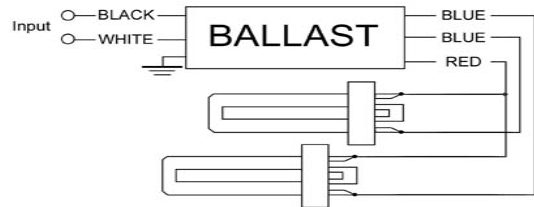

### PRODUCT LABEL

<b>Ballast Wise<sup>™</sup></b> <b>ELECTRONIC BALLAST</b> Cat No: DXE4H8(DXE255HPL1) Type 1 Outdoor Sound Rating: A Start Temp: 0°F-120°F PL Lamp: 2*55W	Input: <b>120V 60Hz</b> Max. Line Current: 0.82A Power Factor: 0.95	 <b>DEXIN LIGHTING</b> 1-866-4DEXIN8	 To 7'0" Ceiling DATE:
--	---	--	------------------------------

**WARNING:**  
 Insulate unused lead(s) for 1000V.  
 Install per National and Local Electrical Codes.  
 Ground Ballast & Mount within 3/4" of ground Metal Reflector.