

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS
DXE4H8(DXE265HPL1)	Electronic	Instant Start	2

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY
120v	65W/55w	105w	1.01A	600VRMS	0.95	60HZ
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	
0°F~120°F	P	1 Outdoor	0.92	0.876	<35%	NO

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS			
	UNITS	M	W	L
	INCHES	13.75	14.25	1.10
	TOL(+/-)	0.05	0.05	0.05
	LEAD LENGTH			
	UNITS	BLACK	WHITE	RED
INCHES	1×16	1×16	1×36	
TOL(+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
32				1.4 lbs	21.0 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.9×12.8×6.6					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

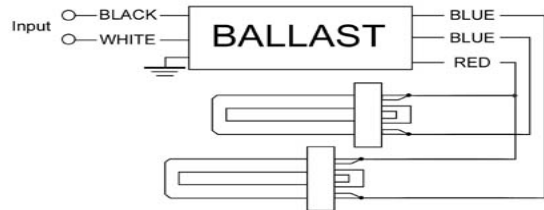

PRODUCT LABEL

BallastWise™ ELECTRONIC BALLAST MODEL NO.: DXE4H8(DXE265HPL)	Input:120V/60Hz Max. Current:1.01A Power Factor:0.95 Start Temp.:0°F~120°F No PCB's PL Lamp: 2*65W, 2*55W	Type 1 Outdoor Instant Start Sound Rating A O.C.V.:600VRMS Class P	LISTED E178684 C® US 61FK	DEXIN LIGHTING 1-866-433-9468		WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector. DATE:
	<small>Tc=50 °Cmax</small>					