

BallastWise[®]




FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE296HO122	Electronic	Instant Start	1or2	F96T12HO,F84T12HO,F72T12HO F64T12HO,F60T12HO,F48T12HO

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
277v	95w,100w,85w, 80w,75w,60w	205w	0.75a	600VRMS	0.99	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1Outdoor	0.92	0.448	<10%		

PHYSICAL CHARACTERISTICS

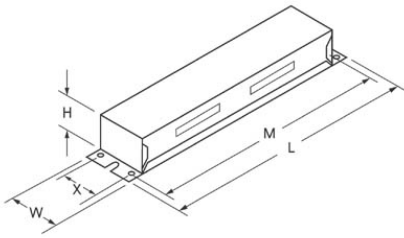

CASE DIMENSIONS					
UNITS	M	X	W	L	H
INCHES	8.90	1.25	2.33	9.50	1.57
TOL (+/-)	0.05	0.05	0.05	0.05	0.05
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1 × 18	1 × 18	1 × 68	2 × 44	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
12				2.03 lbs	26.46 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2 × 10.6 × 6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

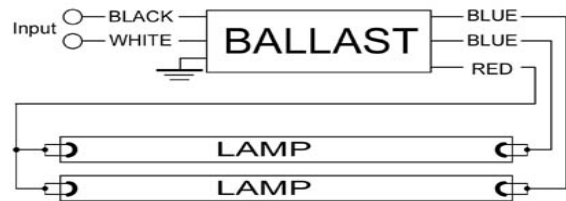

PRODUCT LABEL

<p>Ballast WiseTM ELECTRONIC BALLAST</p> <p>Cat No: DXE296HO122 Type 1 Outdoor Sound Rating: A Start Temp: 0°F-120°F Linear Lamp: 1 or 2*F96T12HO, 1or 2*F84T12HO 1 or 2*F96T12HO, 1or 2*F84T12HO 2*F60T12HO, 2*F48T12HO</p> <p>Instant Start Class P O.C.V. 600VRMS No PCB'S</p> <p>Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>	<p>Input: 277V 60Hz</p> <p>Max Line Current: 0.75A Power Factor: 0.99 Line current THD<10%</p>	LISTED E178684 61FK	<p>Two Lamp Application</p> <p>One Lamp Application</p> <p>DATE:</p>
<p>DEXIN LIGHTING</p> <p>1-866-4DEXIN8 WEST COVINA CA91791</p>			

