

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS


DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2HPL	Electronic	Instant Start	2	PL26w, PL18w

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
277V	26w, 18w	52w	0.20A	600VRMS	High	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.92	1.769	<35%		

PHYSICAL CHARACTERISTICS

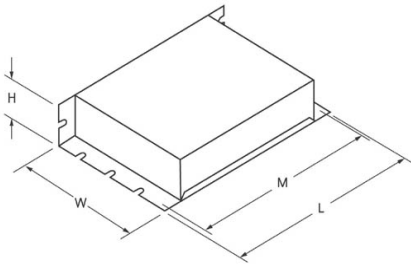

CASE DIMENSIONS				
UNITS	M	L	W	H
INCHES	3.60	3.80	3.10	1.00
TOL (+/-)	0.05	0.05	0.05	0.05
LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	1×16	2×12
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.7 lbs	21.2 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

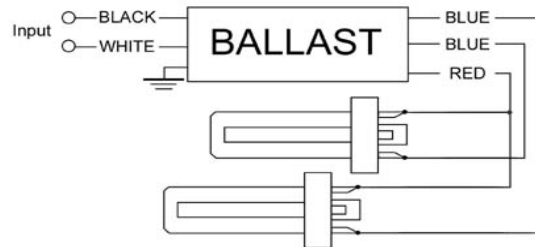

PRODUCT LABEL

<p>Ballast WiseTM ELECTRONIC BALLAST MODEL NO.:DXE2HPL Ground Ballast & Mount Within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.</p>		<p>DATE:</p>	
<p>Input: 277V 60Hz Max. Line Current: 0.20A High Power Factor</p> <p>Type I Outdoor Instant Start Sound Rating: A O.C.V.: 600 VRMS Start Temp: 0°F-120°F Class: P No PCB'S PL Lamp: 2* 18W, 2* 26W</p>		<p>LISTED E178684 61FK</p> <p>DEXIN DE LIGHTING 1-866-4DEXIN8</p>	

