

BallastWise®

®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE2HPLU	Electronic	Instant Start	2	PL-T42W,32W,26W FC12T5,FC9T5,F36 T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V/277V	42W, 32W,26W, 40W, 22W,36W	88W	Max0.74/0.32	600v	0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
-5°F / -20°C	P	1 Outdoor	1	1.136	<10%		


PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	4.57	4.95	2.93	1.35
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1×16	1×16	1×36	1×24	
TOL(+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			

PRODUCT PHOTO

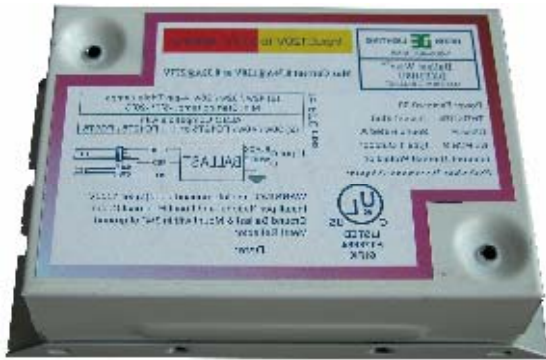

ELECTRICAL DIAGRAM

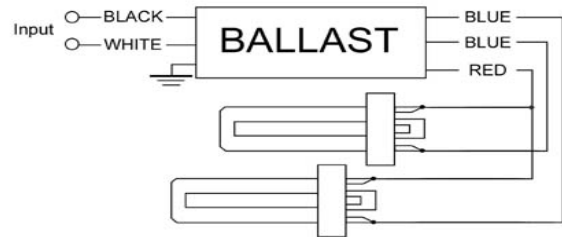

PRODUCT LABEL

<p>DEXIN LIGHTING 1-866-4DEXIN8</p> <p>Ballast Wise™ DXE3H8U ELECTRONIC BALLAST</p> <p>Power Factor>0.99 THD<10% Instant Start Class P, Sound Rated A No PCB'S Type 1 Outdoor Inherent Thermal Protection Protection Thermiques Integree</p> <p> LISTED E178684 61FK</p>	<p>Input: 120V to 277V 50/60Hz</p> <p>Max Current 0.74A@120V or 0.32A@277V</p> <p>Tc: 90°C max</p> <p>(2) 42w / 32w / 26w 4-pin Triple Lamps Min. Starting temp. -5°F / -20°C</p> <p>ALSO Compatible with (2) 36w / 40w / FC12T5 or 1+1 FC12T5 / FC9T5</p> <p>Input BALLAST</p> <p>WARNING: Insulate unused Lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.</p> <p>Date:</p>
---	---

THD<10% Instant Start
Class P, Sound Rated A
No PCB'S Type 1 Outdoor
Inherent Thermal Protection
Protection Thermiques Integree



90°C max.



WARNING: Insulate unused Lead(s) for 1000V.
Install per National and Local Electrical Codes.
Ground Ballast & Mount within 3/4" of ground
Metal Reflector.

Date:

