

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE3H8U-HBF	Electronic	Instant Start	3	F32T8, F25T8, F17T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V to 277V	32w, 25w, 17w	109w	120V Max 0.96A 277V 0.41A	580VRMS	>0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)	NO PCB'S	
0°F	P	1 Outdoor	1.15	1.055	<10%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	1×36	3×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

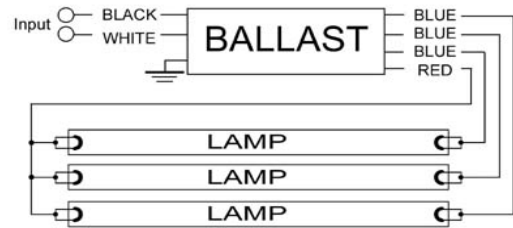

PRODUCT LABEL

Ballast Wise[™] ELECTRONIC BALLAST Cat No: DXE3H8U Instant Start Type 1 Outdoor Class P Sound Rating: A O.C.V.: 580VRMS Start Temp: 0°F-120°F NO PCB'S Lamp Type: 3°F 32T8, 3°F 25T8, 3°F 17T8	Input: 120 to 277 V 50/60Hz Max. Line Current: 120V@0.96A 277V@0.41A Power Factor >0.99 Line Current THD<10% High Ballast Factor WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.	LISTED E178684 61FK DEXIN DE LIGHTING 1-866-4DEXIN8 • Tc=75°C max	 DATE:
--	---	---	-----------