

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE3H8U-NBF	Electronic	Instant Start	3	F32T8, F25T8, F17T8

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V to 277V	32w, 25w, 17w	86w	120V Max 0.75A 277V 0.32A	580VRMS	>0.99	50/60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	1 Outdoor	0.88	1.023	<10%		


PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	8.90	9.50	1.70	1.20
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	1×16	1×16	1×36	3×24	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
20				1.5 lbs	31.3 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

PRODUCT PHOTO

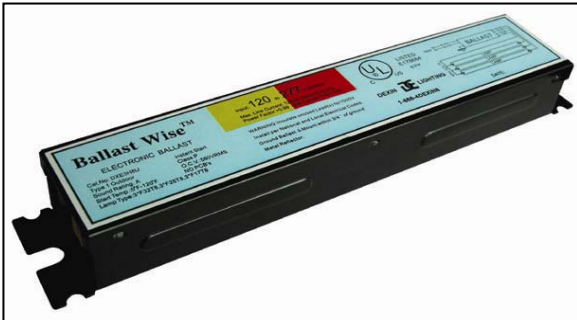

ELECTRICAL DIAGRAM

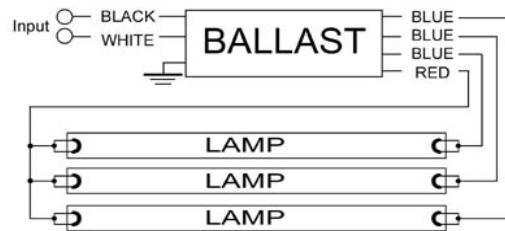

PRODUCT LABEL

Ballast Wise™ ELECTRONIC BALLAST Cat.No: DXE3H8U Type 1 Outdoor Sound Rating: A Start Temp: 0°F-120°F Lamp Type: 3" F32T8, 3" F25T8, 3" F17T8	Instant Start Class P O.C.V.: 580VRMS NO PCB's	WARNING: Insulate unused Lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.	 LISTED E178684 61FK DEXIN LIGHTING 1-866-4DEXIN8		DATE:
	Input: 120 to 277 V 50/60Hz Max. Line Current: 1.20(0.75@277V@0.99) Power Factor >0.99 Max. Current: 1.10(0.32@277V)				