

# BallastWise®



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE3HPL	Electronic	Instant Start	3	PL-C, PL-T

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	26W, 18W	78W	0.68A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (1)	NO PCB'S	
0°F / -18°C	P	1 Outdoor	0.92	1.210	<35%		


### PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	3.60	3.80	3.10	1.00
	TOL (+/-)	0.05	0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×8	1×8	1×12	3×12	
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
30				0.7 lbs	21.2 lbs	
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	13.2×10.6×6.7					

### PRODUCT PHOTO

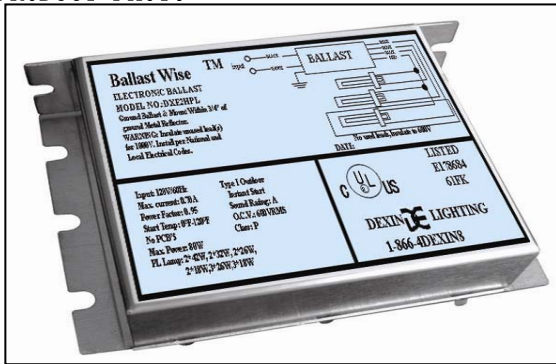

### ELECTRICAL DIAGRAM

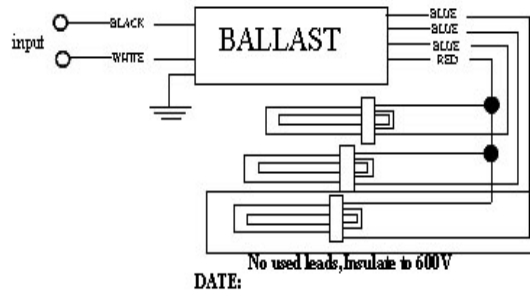

### PRODUCT LABEL

<b>Ballast Wise™</b> ELECTRONIC BALLAST MODEL NO. DXE2HPL Ground Ballast & Mount Within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes.	<p>No used leads, Insulate to 600V</p> <p>DATE:</p>
Input: 120V/60Hz Max. current: 0.70 A Power Factor: 0.95 Start Temp: 0°F-120°F No PCB'S Max. Power: 80W PL Lamp: 2'-4W, 2'-2W, 2'-2W, 2'-18W, 3'-26W, 3'-18W	Type I Outdoor Instant Start Sound Rating: A O.C.V.: 600 VRMS Class: P
	LISTED E178684 61FK <b>DEXIN LIGHTING</b> 1-866-4DEXIN8

