

BallastWise®



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG NO.	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE454HO51	Electronic	Instant Start	4	F54T5HO, F58T8 PL55W PL50W


ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	REQUENCY	LAMP WATTS	INPUT WATTS	INPUT CURRENT	THD	PF	SOUND RATED A	
120V	60Hz	54W, 58W, 55W, 50W	230W	Max 2.02A	<30%	0.95		
MIN START TEMP	Class P	TYPE 1 Outdoor	BALLAST FACTOR		BEF	O.C.V.	BALLAST FREQUENCY	NO PCB'S
0°F/18°C			1.00	0.435	600VRMS	>40kHz		

PHYSICAL CHARACTERISTICS

CASE DIMENSIONS					
UNITS	M	L	W	H	
INCHES	18.74	19.24	1.73	1.00	
TOL(+/-)	0.05	0.05	0.05	0.05	
LEAD LENGTH					
UNITS	BLACK	WHITE	RED	BLUE	
INCHES	CONNECTOR	CONNECTOR	2x36	4x24	
TOL(+/-)	1	1	+3/8,-0	+3/8,-0	

PRODUCT PHOTO

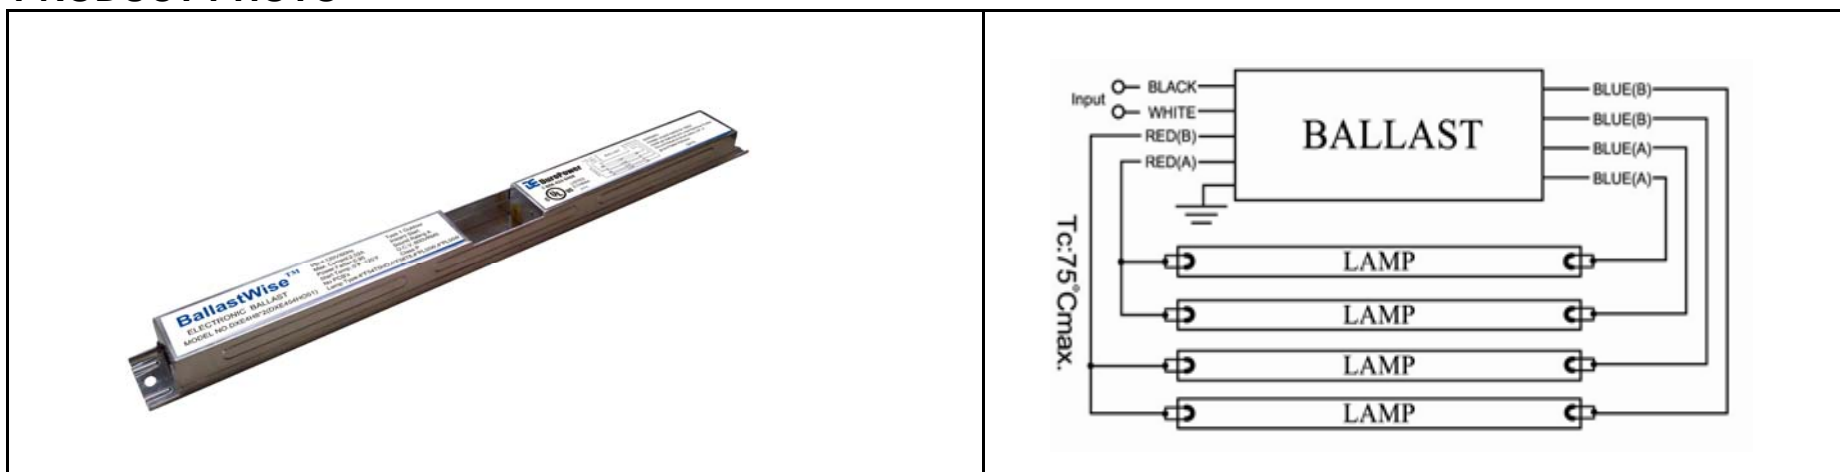

PRODUCT LABEL

<p>BallastWise™ ELECTRONIC BALLAST MODEL NO. DXE4H8*2(DXE454HO51)</p>	<p>Input: 120V/60Hz Max. Current: 2.02A Power Factor: 0.95 Start Temp.: 0°F~120°F No PCB's Lamp Type: 4*F54T5HO, 4*F58T8, 4*PL55W, 4*PL50W</p>	<p>Type 1 Outdoor Instant Start Sound Rating A O.C.V.: 600VRMS Class P</p>	<p>DuroPower 1-866-433-9468 LISTED E178684 61FK</p>		<p>WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector. DATE:</p>
--	--	--	--	--	--