

BallastWise[®]



FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE4H5	Electronic	Instant Start	4	F28T5, F21T5, F14T5, F13T5, F8T5

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	28W, 21W, 14W, 13W, 8W	112w	Max 1.08A	750V	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD(1)	NO PCB'S	
0°F	P	10Outdoor	0.92	0.821	<35%		

PHYSICAL CHARACTERISTICS

	CASE DIMENSIONS				
	UNITS	M	L	W	H
	INCHES	13.75	14.25	1.10	1.00
	TOL (+/-)		0.05	0.05	0.05
	LEAD LENGTH				
	UNITS	BLACK	WHITE	RED	BLUE
INCHES	1×16	1×16	2×24	2×24	2×36
TOL (+/-)	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0	+ 3/8, - 0


CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
28						
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			
	14.4×12.4×5.5					

PRODUCT PHOTO



ELECTRICAL DIAGRAM

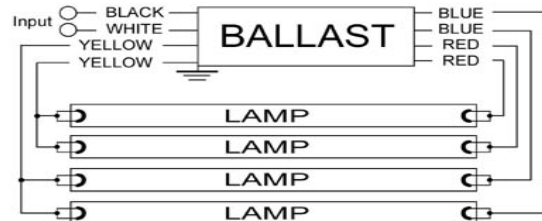

PRODUCT LABEL

Ballast WiseTM ELECTRONIC BALLAST MODEL NO: DXE4H5	Input: 120V/60Hz Max Current: 1.08A Power Factor: >0.95 Start Temp: 0°F-120°F No PCB's Linear Lamp: 4" F28T5, 4" F21T5, 4" F14T5, 4" F13T5, 4" F8T5	Type 1 Outdoor Instant Start Sound Rating: A O.C.V.: 750V/RMS Class: P	LISTED E178684 1-800-4DEXIN8 WEBT COVINA CA91781		Ground Ballast & Mount within 3/4" of ground Metal Reflector. WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. DATE:
--	--	--	--	--	---