

# FLUORESCENT BALLAST SPECIFICATIONS


## DESCRIPTION

CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
<b>DXE600HIDU1</b>	Electronic	Soft Start	1	MH/CDM/HPS Double Ended/HQI Lamp

## ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
90~265V	600W	630W	7.07A~2.43A	5.0KVRMS	0.99	60Hz	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	Crest Factor	THD	NO PCB'S	
-40 F/-40°C	P	1 Outdoor	1.00	<1.6	<10%		


## PHYSICAL CHARACTERISTICS

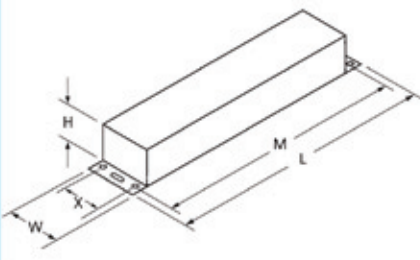	CASE DIMENSIONS					
	UNITS	M	X	L	W	H
	INCHES	10.94	2.68	11.38	4.72	3.15
	TOL(+/-)	0.05	0.05	0.05	0.05	0.05
CONNECTOR WIRETRIP						
UNITS	L	N	GROUND	BLACK	WHITE	
INCHES	PLUG	PLUG	PLUG	12	12	
TOL(+/-)				+3 / 8, -0	+3 / 8, -0	

## PRODUCT PHOTO



## ELECTRICAL DIAGRAM

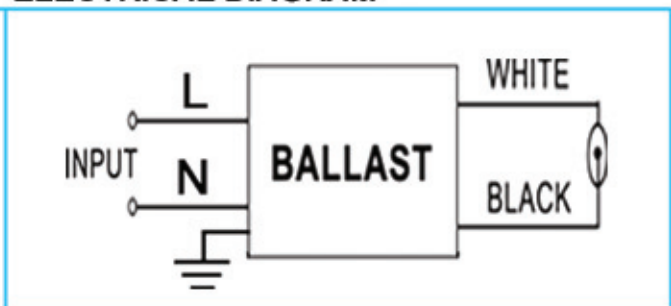

## PRODUCT LABEL

