

# BallastWise<sup>®</sup>



## FLUORESCENT BALLAST SPECIFICATIONS

### DESCRIPTION


CATALOG	TYPE	STARTING METHOD	NUMBER OF LAMPS	LAMP TYPE
DXE 896HO121	Electronic	Instant Start	8	F96T12HO, F84T12HO, F72T12HO, F64T12HO, F60T12HO

### ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE	LAMP WATTS	INPUT WATTS	INPUT CURRENT	OCV	PF	FREQUENCY	SOUND RATED
120V	95W, 100W, 85W, 80W, 75W	682W	6.18A	600VRMS	0.95	60HZ	A
MIN START TEMP	CLASS	TYPE	BALLAST FACTOR	BEF	THD (3)	NO PCB'S	
-20° F / -28.8°C	P	1 Outdoor	0.88	0.129	<30%		

### PHYSICAL CHARACTERISTICS


CASE DIMENSIONS										
UNITS	M	X	L	M	H					
INCHES	23.50		2.40		24.25	3.19				
TOL (+/-)	0.05		0.05		0.05	0.05				
LEAD LENGTH										
UNITS	BLACK	WHITE	RED	YELLOW	RED/WHITE	PURPLE	BLUE	BROW	BLUE/WHITE	ORNGE
INCHES	1×44	1×44	1×68	1×68	1×68	1×68	2×44	2×44	2×44	2×44
TOL (+/-)	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0	+3/8, -0

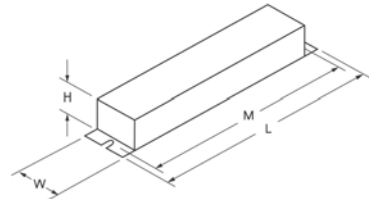


### CARTON CHARACTERISTICS

UNITS/CARTON	CARTONS/LAYER	#OF LAYER	UNITS/PALLET	PIECE WEIGHT	CARTON WEIGHT	PALLET WEIGHT
CARTONS/PALLET	CARTON DIMENSIONS	PALLET DIMENSIONS	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET			

### PRODUCT PHOTO

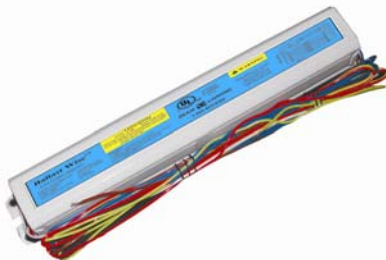

### ELECTRICAL DIAGRAM

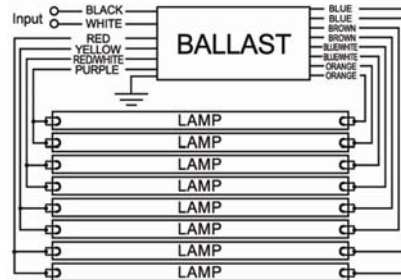

<b>Ballast Wise<sup>™</sup></b> ELECTRONIC BALLAST Cat.No.: DXE896HO121    Sound Rating A Type 1 Outdoor    O.C.V.: 600VRMS Instant Start    Class P Start Temp.: 0°F-120°F    No PCB's	Input: 120V/60Hz Max Line Current : 6.18A    Power Factor: 0.95 Lamp Type: 8°F96T12HO/95W, 8°F84T12HO/100W, 8°F72T12HO/85W, 8°F64T12HO/80W, 8°F60T12HO/75W	LISTED E178684 61FK	<b>WARNING</b> Risk of Electric shock • Turn power off before servicing • Properly ground ballast and fixing	DATE:
	WARNING: Insulate unused lead(s) for 1000V. Install per National and Local Electrical Codes. Ground Ballast & Mount within 3/4" of ground Metal Reflector.	1-866-4DEXIN8		

